


## Biscuit Joiner

The Biscuit Joiner / Domino Joiner Safety Sheet

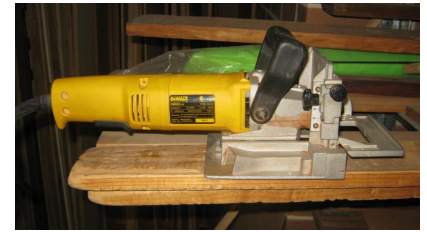

### DO'S

- When cutting (or slotting) always clamp material securely on a flat, stable surface.
- Always ensure material is free of defects such as knots, twisting, cupping.
- Unplug joiner from the wall before making adjustments to cut or slotting depth
- Wear safety glasses at all times when using the plate joiner.
- Make sure the switch is in the off position before the plate joiner is plugged in.
- Keep the power cord positioned away from the work to be performed to avoid cutting the cord.

### DON'TS

- Do not lay the plate joiner down until the blade has come to a complete stop.
- Do not hold the joiner against the body when making adjustments
- Never attempt join timber less than 10mm in thickness.

### Question 1.

I have read and understood the DO'S AND DON'TS on the safe use of the Biscuit Joiner / Domino Joiner. In addition proper joiner use has been clearly demonstrated and explicitly explained to me by my teacher.

|          |
|----------|
| CONTRACT |
| _____    |
| _____    |
| _____    |
| _____    |
| _____    |
| _____    |

( ) 

|          |
|----------|
| CONTRACT |
| _____    |
| _____    |
| _____    |
| _____    |
| _____    |


 True

( ) False

## Question 2.

Click and identify the following 5 parts of the Biscuit Joiner

- Trigger
- Handle
- Base
- Centering Stop
- Centering stop adjustment

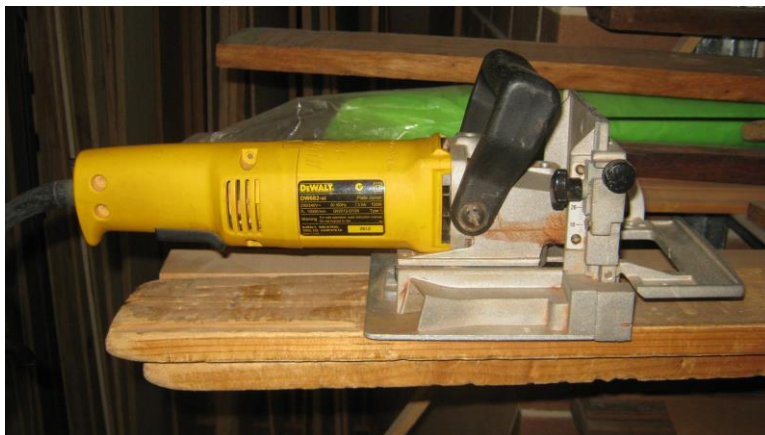

## Question 3.

All work should be clamped securely to the workbench when cutting biscuit slots with the joiner.

- True
- False

## Question 4.

Select the Personal Protective Equipment you will need when carrying out any biscuit joiner operation.

- Protective Eye Shields
- Fully enclosed leather shoes.
- Apron for torso protection

## Question 5.

Never leave the tool switched on and turn the power off at the power source.

- True

False

### Question 6.

Match the following items to reduce hazards

|                                |
|--------------------------------|
| Eye damage                     |
| Cuts to the hand or body       |
| Loss of control of the joiner. |

|  |
|--|
| Wear eye shields   |
| Make sure the work is firmly clamped down to a flat surface              |
| Make sure the power switch is in the off position before plugging it in. |

### Question 7.

Biscuit joiners cause a great deal of noise. Choose the item of Personal Protective Equipment which will protect you.



Ear Muffs / Plugs

Eye Shields.

Apron.

### Question 8.

Which of the following should be checked on the biscuit joiner before the power cord is plugged in?

The position of the On / Off Switch

The centering stop position

The depth of the cut

The Length of the Cut

### Question 9.

When should the plate jointer be laid down after a cut has been completed?

As soon as the cut is finished

All selections

Only after being unplugged

When the blade stops turning

### Question 10.

Which of the following should not be worn when operating the biscuit joiner?

- Loose clothing
- Long Hair
- All selections
- Finger rings

### Question 11.

Which position should the joiner NOT be held in



- Firmly in two hands with the blade pointed away from the body
- Close to or up against the body.
- Pointed vertically down

### Question 12.

Before the switch on the biscuit joiner is turned on, how should it be held?

- Firmly in one hand
- Let it rest firmly on the bench top.
- Swinging by the power cord.
- Firmly with both hands

### Question 13.

The safest place for the electrical cord when the plate jointer is being used is to:

- move it out of the line of the work being performed.
- put the cord around the operator's neck.
- keep it in front of the plate jointer so you can see it at all times.
- It doesn't matter